

Highland Passive Grease Interceptors

For Aboveground and Underground Applications



Highland Tank[®]



Single Basin



Double Basin



Triple Basin

Highland Passive Grease Interceptors (PGI)

Highland's Passive Grease Interceptors help restaurants and food service facilities comply with the EPA Sewer Pretreatment Regulations! Highland PGI are gravity-based grease interceptors designed to intercept and remove large quantities of sewer clogging fats, oils, and grease (FOG) that might interfere with the proper drainage and treatment of municipal wastewater. These large capacity interceptors have much more retention time, storage capacity, and require much less maintenance by the food facility personnel than smaller capacity indoor grease traps. In addition, Highland PGI are lighter than traditional concrete units, resulting in lower delivery, crane rental, and installation costs.

Highland PGI are highly efficient and meet or exceed all municipal FOG discharge regulations. Their design, construction, and sizing conform to recognized plumbing codes, including those with 30 minute retention times.

Higher Performance Than Competitive Units!

Highland's easy to install interceptors are typically located outside a building near the source of the discharge. They are buried underground to receive the gravity flow from all grease or solids receiving kitchen fixtures and drains.

Like Highland's patented oil/water separators, our PGI contain specially designed internal baffles designed to reduce flow turbulence and accelerate the separation process. This exclusive "Diffusion and Switchback Baffling System" permits the interceptor to retain wastewater long enough for the liquefied grease to separate, cool, and congeal.

The interceptor is divided into multiple compartments. Solids sink to the bottom and collect at the sludge baffles. The grease floats to the surface and accumulates at the grease dams, leaving clearer water beneath as the discharge. Regular inspections determine the thickness of the grease and solids layer. Grease is pumped out through the top quick-opening manways. The cylindrical design is easier to clean than flat bottom interceptors. During pump-out, all the solids and liquids flow to the bottom centerline, right to the suction hose!

Advantages

- Large volumes with long retention times, even 30 minutes!
- Available for above or underground installation
- "Diffusion and Switchback Baffling System" results in better performance.
- Pressure tested for tightness.
- Lighter and easier to install than similar sized concrete units.
- Easy to clean! Solids and liquids flow to the bottom centerline, right to the suction hose!
- State of the art exterior corrosion protection system with 10-year warranty (underground).
- Exterior polyurethane coating for protection from the environment (aboveground).
- Heavy-duty interior high temperature, acid resistant lining.
- Large manways for inspection, maintenance, and access.
- Conforms to IAPMO - PS - 80 - 2006.


Construction

Highland PGI are of the highest quality and are designed for the rigors of an underground environment. They are constructed from heavy-duty carbon steel, meeting ASTM specifications, for superior strength and durability. Unlike old-style concrete or fiberglass units, Highland's PGI don't crack or collapse under hydrostatic pressure! And we can certify that they're tight – all Highland interceptors are pressure tested in the factory!

Factory and Steel Tank Institute specifications are followed to assure complete internal and external corrosion protection. We offer complete interior/exterior blast and finish coatings, including the Highland HighGuard, UL-1746 approved protective coating with a limited 10-year warranty. Additionally, a full immersion, high temperature, acid resistant internal polyurethane lining is applied to assure years of continuous service and ease of cleaning.

Stainless steel or double-wall construction are available, as are aboveground rectangular tank designs with optional steam or electric heating systems. Site-specific custom designs are also available so that you can tailor volumes, compartments, inlets, outlets, or baffles to satisfy specific code requirements.

General Arrangement - Double Basin - Most Popular and Versatile Design

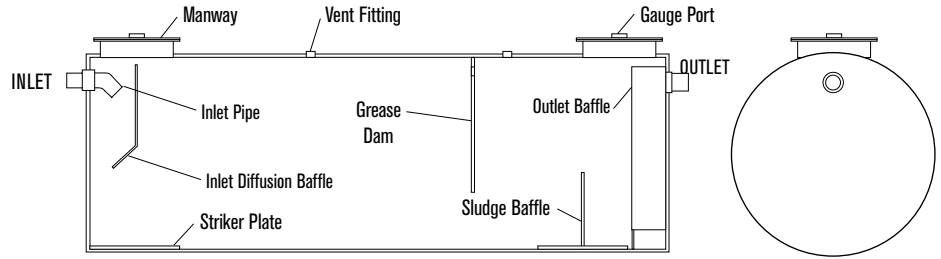


Manhole extensions are available as an option.


Options

- Stainless Steel Construction
- Double-wall Secondary Containment
- Field-Adjustable Manway Extensions
- EZ- Access Manway
- Traffic Duty Covers
- Steam or Electric Heating Systems
- Flanged Connections
- Insulation Systems
- ACT-100-U® or STI-P3® Corrosion Protection Systems
- Extended Warranties

Triple Basin - Approved Washington Suburban Sanitary Commission (WSSC)

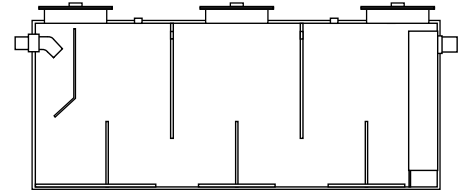

Single Basin - Simple "Knock-Out" Design

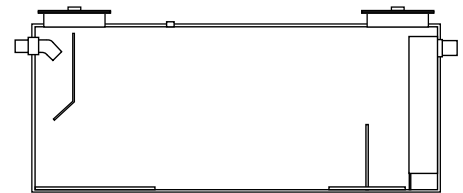

Nominal Capacity (gal.)	Operating Grease Volume (gal. / lbs.)	Nominal Inside Dimensions		Inlet / Outlet** Diameter
		Diameter	Length	
* 240	63 / 483	3' 2"	4' 0"	4"
* 300	76 / 581	3' 2"	5' 0"	4"
550	137 / 1,041	3' 6"	7' 9"	4"
750	190 / 1,444	3' 6"	10' 9"	4"
1,000	247 / 1,875	4' 0"	10' 9"	4"
1,500	403 / 3,065	5' 4"	9' 0"	4"
2,000	514 / 3,906	5' 4"	12' 0"	4"
2,500	643 / 4,886	5' 4"	15' 0"	4"
3,000	771 / 5,862	5' 4"	18'-0"	4"
4,000	1,028 / 7,817	5' 4"	24' 0"	4"
5,000	1,245 / 9,465	6' 0"	23' 10"	6"
6,000	1,497 / 11,383	6' 0"	28' 8"	6"
7,000	1,847 / 14,040	7' 0"	24' 4"	6"
8,000	2,125 / 16,155	7' 0"	28' 0"	6"
9,000	2,349 / 17,858	8' 0"	24' 0"	6"
10,000	2,611 / 19,842	8' 0"	26' 8"	6"
12,000	3,133 / 23,811	8' 0"	32' 0"	8"
15,000	5,000 / 37,996	10' 0"	25' 6"	8"
20,000	5,413 / 41,140	10' 6"	31' 0"	8"
25,000	6,544 / 49,738	10' 6"	38' 9"	8"
30,000	7,580 / 57,606	10' 6"	46' 6"	8"
40,000	10,035 / 76,269	12' 0"	47' 6"	8"
50,000	12,570 / 95,538	12' 0"	59' 6"	8"
60,000	15,160 / 190,770	13' 0"	60' 6"	8"

* One Manway, Single-Basin & Double-Basin ONLY. ** All connections are plain end (PE) unless otherwise specified. Larger diameters available. Gravity Grease Interceptor (GGI) sizing and construction is consistent with industry protocols for complying with the sewer pretreatment regulations. GGI sizing is based on thirty-minute retention time. Consult Highland Tank Engineering Department for alternate sizing methods.

Please visit us at www.highlandtank.com



One Highland Road
Stoystown, PA 15563
814-893-5701
FAX 893-6126

4535 Elizabethtown Road
Manheim, PA 17545
717-664-0600
FAX 664-0617

958 19th Street
Watervliet, NY 12189
518-273-0801
FAX 273-1365

2700 Patterson Street
Greensboro, NC 27407
336-218-0801
FAX 218-1292

2225 Chestnut Street
Lebanon, PA 17042
717-664-0602
FAX 664-0631

1510 Stoystown Road
Friedens, PA 15541
814-443-6800
FAX 444-8662