




This PY25ULDW is equipped with our electronic FCM system. The enclosure on the left side of the tank provides an easy interface with a remote pumping unit and for power, etc. for this unit.



Option 427A - alternating duplex pump/motor sets are mounted on this PY100ULDW. The green device with the red cap is a normally closed solenoid

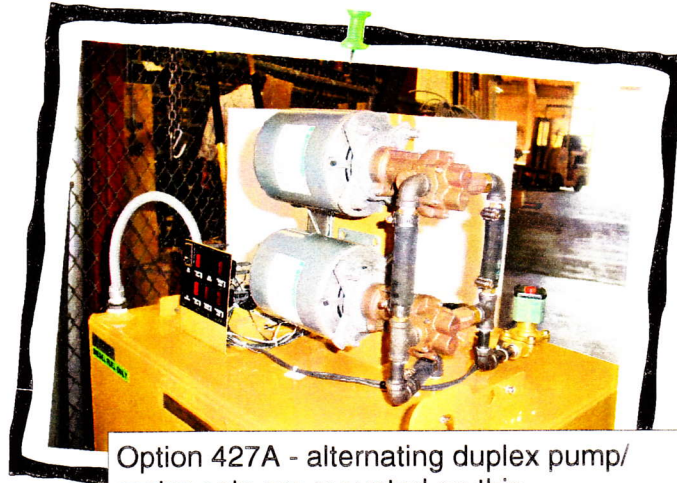

Here is a PY275ULDW inside a 150% rupture basin (option 385). Also, there is our U/L Listed enclosed control panel (option 465) and option 427A duplex pumps and motors. This system has two Option 295 leak detectors — one in the double wall area and the other in the rupture basin.



This special dimension day tank is a PY400UL with a 150% rupture basin. It sports a 10 GPM pump coupled to a 3/4 HP motor and a sight glass (option #326). The removable plug at the bottom center on the rupture basin is an access port to the lower hand valve of the sight